
# **Power Line EMI Filter**

1. Type: PF282C-100

2. Dimensions: (mm)

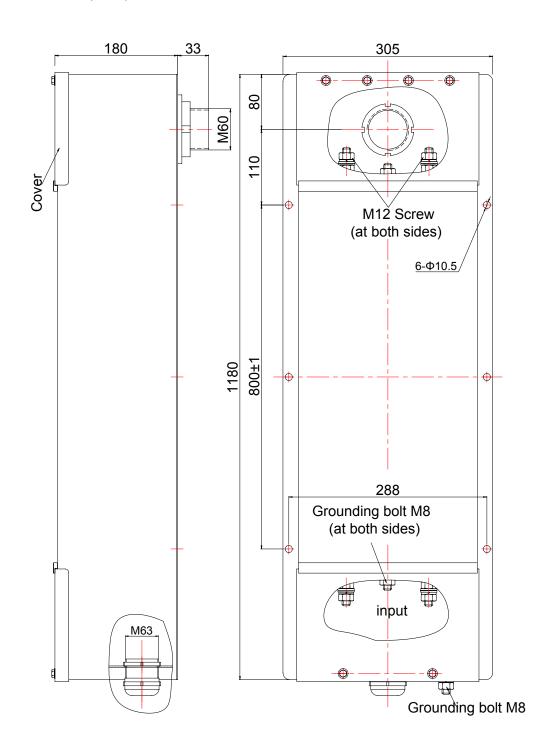

#### WEMC TECHNOLOGY

#### 3. Technical Data:

①Rated Voltage: 250VAC/500VDC ②Operating Frequency: 0-60Hz

③Rated Current: 100A ④Insertion Loss: 100dB, 14kHz-40GHz

⑤Climatic Category: 25/070/21

4. Assembly Parts: 1 M60 Conduit Screw: 1pc

2 Gasket 60: 1pc


③ M60 Screw Nut: 1pc

4 EMI Gasket 60: 1pc

⑤ Certificate: 1pc

6 Cable Gland M63: 1pc

### 5. Typical Insertion Loss Performance Curve

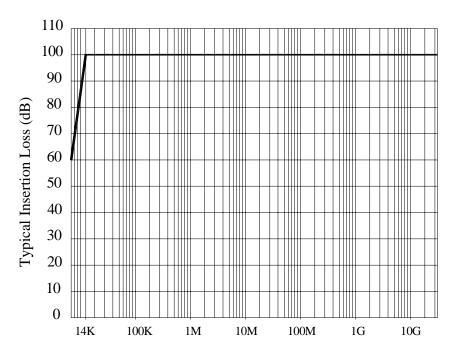

Frequency (Hz)

Asymmetric Performance in 50 ohm System With or Without load

## 6. Product in photo PF482C-100



# 7. Installation Diagram:

